



Gyproc No-Coat Flex Tape

High-strength, flexible corner tape to perfectly fit any angle

Key benefits



Robust

Gyproc No-Coat Flex Tape's high strength co-polymer core offers a strong and uniform surface which prevents cracks, blows and dents. Corners will not separate from the wall and can withstand shifting, drying and humidity variations. Its high durability prevents return visits to the corner caused by post-install damage.



Easy

Featuring a low-friction, metal-free composition, Gyproc No-Coat Flex Tape is quick, easy and safe to install. As Gyproc No-Coat Flex Tape is installed using the same methods as traditional corner tape, no additional jointing training is required. Boxed in a 30m roll, Gyproc No-Coat Flex Tape is easy to transport.



Flexible

The memory-free hinge holds the desired angle and makes it easy to adjust for both internal and external angles. Perfect for plastering, Gyproc No-Coat Flex Tape makes raked and splayed angles a breeze, providing a straight line every time.

Technical enquiries

British Gypsum
Technical Advice Centre
East Leake
Loughborough
Leicestershire
LE12 6HX

T: 0115 945 6123
F: 0115 945 1616
E: bgtechnical.enquiries@bpb.com

Training enquiries: 0844 561 8810

British Gypsum November 2017
BG-GNCFT-01



British Gypsum
Head Office, East Leake,
Loughborough,
Leicestershire, LE12 6HX
Tel: 0115 945 1000

british-gypsum.com

 [@britishgypsum](https://twitter.com/britishgypsum)

 www.linkedin.com/company/british-gypsum



 **British Gypsum**
SAINT-GOBAIN



Gyproc No-Coat Flex Tape

Get the perfect inside or outside corner of any angle looking straight and true

Gyproc No-Coat Flex Tape provides perfect corners by fitting every angle, every time.

Applied with your choice of Gyproc Easi-Fill or Gyproc Joint Filler to both sides of the external corner, it has a uniform, strong structural bond due to its paper backing.

Faced with a low-friction, high quality paperboard and backed with a joint tape paper, it is ideal for applying paint or wallpaper to.

Benefits:

- Tapered co-polymer core
- Memory-free hinge
- Excellent standout strength for a truer, straight!



Installation instructions



Open the Gyproc No-Coat Flex Tape box and feed the product through the slot on the side. Insert the hook of the tape measure into the narrow slot to measure the length required.



Cut to the desired length with light duty snips or scissors. Its metal-free composition makes cutting safer and easier.



With an appropriate taping knife, apply your choice of Gyproc Easi-Fill or Gyproc Joint Filler to both sides of the corner.



Once applied, press Gyproc No-Coat Flex Tape into position. Remove the excess filler with a taping knife and let it dry.




Use an appropriate finishing knife to skim over the edges of the corner and let it dry.



Once dry, sand and finish.

With a high strength, tapered, co-polymer core, Gyproc No-Coat Flex Tape will not split or dent

The formulated surface paper accepts any finish and resists abrasion

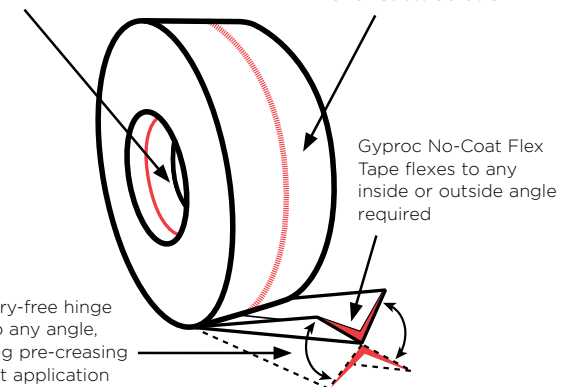

Its memory-free hinge adjusts to any angle, eliminating pre-creasing for instant application